



ADTRAN

424RG

Wireless Residential Gateway ONT



Benefits

- Supports Gigabit Broadband over Wi-Fi
- Eliminates Wi-Fi dead spots via Wave 2 IEEE 802.11ac performance
- Rapid home installation from eliminated home wiring and ONT provisioning steps
- Remote service troubleshooting and home management via TR-69
- Optimized for multi-user homes via MU-MIMO technology
- Provides Class of Service (CoS) levels for prioritizing multi-user, multi-services
- Supports both GPON and Active Ethernet deployment models
- USB 2.0 interface device and storage support
- Supports both VoIP and TDM Voice
- Supports both IPTV and OTT video support

Overview

Wi-Fi device access has become an absolute requirement in today's homes and businesses. Smartphones, tablets, streaming devices, and Wi-Fi-enabled smart-home devices are placing a tremendous strain on the home network. In addition, the emergence of Gigabit broadband offerings have exposed Wi-Fi as a potential bottleneck for delivering advertised speeds down to the device. All this requires service providers to rethink how they deliver residential connectivity over a wireless network as they look to minimize operational costs while ensuring higher customer satisfaction.

The Solution

The ADTRAN® 424RG Wireless Residential Gateway is an integrated wireless router and gateway with the industry's first Wave 2 802.11ac 4x4 MIMO implementation, designed to deliver near Gigabit throughput and the extended coverage to make the fully wireless home a reality.

Enhanced Multi-user HDTV Quality over Wireless

The ADTRAN 424RG includes built-in 802.11ac 4x4 antennas with Multi-User Multiple Input Multiple Output (MU-MIMO) to deliver wired equivalent performance, including full HDTV quality with 1080p video resolution. It simultaneously delivers up to four flawless High-Definition (HD) video streams at more than 100 Mbps data rates, over 100 feet, and guarantees this performance nearly 100 percent of the time through near-zero Packet Error Rate (PER) data transfers, regardless of signal impairments and dead zones that are typical in the home.

Better 802.11ac Performance with Beamforming

The ADTRAN 424RG Wireless Residential Gateway incorporates MU-MIMO with beamforming technology to deliver dramatic improvement in Wi-Fi 802.11ac/n performance, reliability, range and coverage. MU-MIMO supports four simultaneous data streams. Beamforming makes it possible to steer these data streams in the direction of associated clients, ensuring dedicated bandwidth to the wireless devices while simultaneously avoiding interference.

Game-changing Operational Savings

The ADTRAN FTTH solution inclusive of the 424RG drastically reduces the time and labor required to install, provision and initiate billing for a new service. This is a result of the eliminated home wiring due to the wireless feature set of the 424RG and from the simplified and automated back-office ONT service provisioning. A single technician simply plugs-in the Wireless Residential Gateway into the wall and the device is automatically directed to the auto-provisioning portal to choose their service options which then automatically provision the service and initiate the billing cycle.

ADTRAN 424RG

Product Specifications

Ethernet Interfaces

- 10/100/1000Base-T Interface with RJ-45 Connectors
- Ethernet Port Auto Negotiation or Manual Configuration
- MDI/MDIX Automatically Sense
- Hardware Priority Queues on the Downstream Direction in Support of CoS

Ethernet Services

- Symmetric 1 Gbps Throughput
- 802.1D Bridging
- 802.1x Authentication
- Virtual Switch Based on 802.1q VLAN
- VLAN Tagging/Untagging Per Ethernet Port
- VLAN Stacking (Q-in-Q) and VLAN Translation
- IP ToS/DSCP to 802.1p Mapping
- Quality of Service (QoS)
 - ◆ VLAN-ID
 - ◆ 802.1p bit
 - ◆ DSCP to p Bit Translation
- Marking/Remarking of 802.1p
- IGMP v2/v3 Snooping
- Broadcast/Multicast Rate Limiting

Gateway Features

- Multiple WAN Interfaces Supporting
- WAN Connection
 - ◆ Point-to-Point Protocol over Ethernet (PPPoE)
 - ◆ Dynamic Host Configuration Protocol (DHCP)
 - ◆ Static
- DHCP Server for LAN Devices
- DNS Relay
- Network Address Translation (NAT)/Network Address Port Translation (NAPT)
- Port Forwarding
- Static Routing
- Access Control List (ACL)
- VPN Pass Thru for Point to Point Tunneling Protocol (PPTP), Layer 2 Tunneling Protocol (L2TP) and IP Security Protocol (IPSec)
- Firewall
- Application Layer Gateway (ALG)
- Demilitarized Zone (DMZ)

- Dynamic Domain Name Server (DDNS)
- Network Time Protocol (NTP)
- Universal Plug and Play (uPnP)
- IGMP Proxy
- IPv6
 - ◆ Stateless Address Autoconfiguration (SLAAC)
 - ◆ DHCPv6
 - ◆ PPPoEv6
 - ◆ DNSv6

WLAN Interface

- Compliant with IEEE 802.11 b/g/n/ac
- 2.4 GHz and 5.0 GHz
- MIMO: 2.4 GHz 2x2, 5.0 GHz 4x4
- Dual Band Radios
 - ◆ 2.4 GHz 2x2
 - ◆ 802.11 b/g/n
 - ◆ 5.0 GHz 4x4
 - ◆ 802.11 n/ac
- 4x SSIDs per Radio
- 64 and 128 Bit Wireless Encryption Protocol (WEP) Support
- Push Button WPS

USB Interface

- 1 USB Host Interface
- Compliant to USB 2.0
- Network Storage

POTS Interface

- RJ-11 Interface
- 3-REN, 50V RMS
- **VoIP Voice:** Both SIP and MGCP
- **TDM Voice:** Both GR.303, GR-57 and TR-08
- Full CLASS Feature Set
- Both ANSI and ETSI POTS
- T.38 Facsimile
- Configurable Dial Plan
- Configurable Country Specific Ring-back Tones (Frequency and Cadence)
- DHCP Client or Static IP Configuration
- Optionally Metallic Loop Testing

Wireless Residential Gateway ONT

GPON Interface

- Compliant with ITU-T G.984 GPON Standards
- Compliant with ITU-T G.984.2 Amd1, Class C+
- Support G.984.5 Blocking Filter
- Multiple T-CONTs per Device
- Multiple GEM Ports per Device
- DBA Reporting by Piggyback Reports in the DBRu (Mode 0 and Mode 1)
- 802.1p Mapper Service Profile on U/S
- Mapping of GEM Ports into a T-CONT with Priority Queues Based Scheduling
- Support Multicast GEM Port and Incidental Broadcast GEM Port

Dimensions

- 1.5 in. x 8.5 in. x 6.7 in. (38 mm x 216 mm x 170 mm)
(H x W x D)

Power Supply

- +12V (Feed via External AC/DC Adapter)
- Dying Gasp Support
- Power Switch
- **Power Consumption:** Less than 15W

Working Environment

- **Temperature:** 32° F – 104° F (0° C – 40° C)
- **Humidity:** 5% – 95% Relative Humidity

Safety and EMI

- CE Certificate
- FCC/UL Compliant

Environmental Directive

- RoHS 6 of 6

Installation


- Wall Mounting and Desktop Mounting

LEDs


- Power
- GPON
- Optical
- LAN
- VoIP

OAM

- Standard Compliant OMCI (the Embedded Operations Channel) Interface as Defined by ITU-T G.988
- Provisioning all kinds of Services including Ethernet, VoIP etc.
- Alarming and Performance Monitoring
- Remote Software Image Download over OMCI, as well as Activation and Rebooting
- Hold Two Software Sets with Software Image Integrity Checking and Automatic Rollback

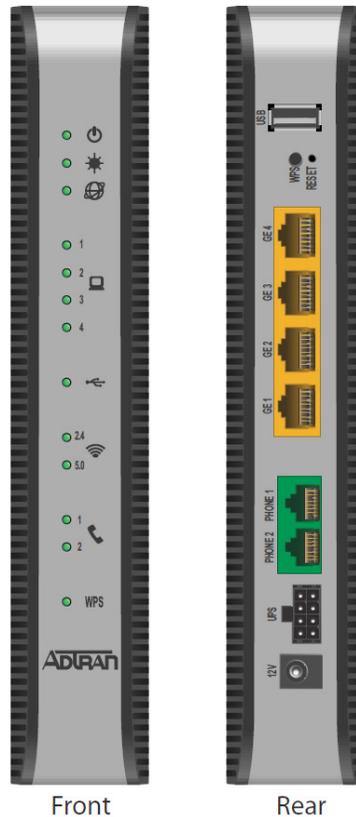

ADTRAN 424RG

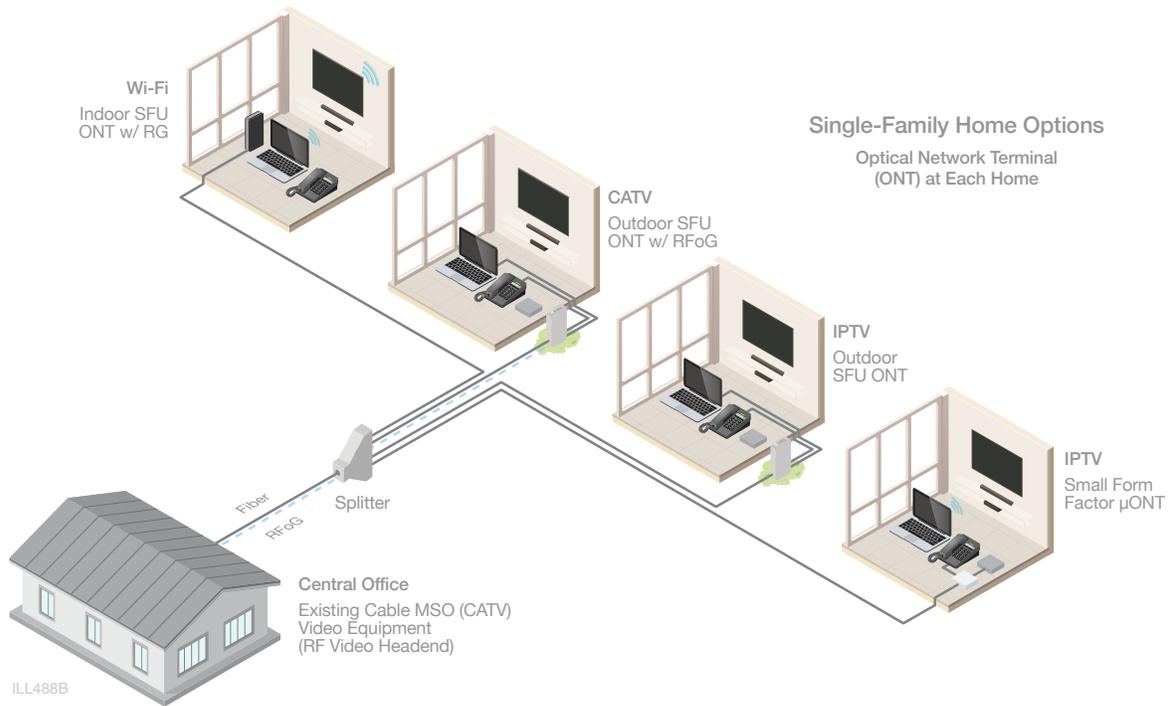

Ordering Information

Equipment	Part No.
ADTRAN 424RG Wireless Residential Gateway ONT	1287781F2



Pulse Supply
909 Ridgebrook Road., Sparks, Maryland 21152, USA
TEL : +1-410-583-1701 FAX : +1-410-583-1704



E-mail: sales@pulsesupply.com
<https://www.pulsesupply.com/adtran>

61287781F2-8A

April Copyright © 2018 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN® and the other trademarks listed at www.adtran.com/trademarks are registered trademarks of ADTRAN, Inc. or its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit www.adtran.com/warranty.

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding exportation of ADTRAN items (e.g. commodities, technology, software), please visit www.adtran.com/exportlicense.



ISO 9001
ISO 14001
TL 9000

