

NetVanta

# 8008

## Gigabit Multi-Service Edge Switch



### Benefits

- Supports highly scalable multi-rate Gigabit business service delivery
- Supports standard 1 Gbps and upto 5Gbps Carrier Ethernet service delivery
- Supports 4G/LTE expansion services inclusive of indoor small cell deployments
- Hardened for cell site deployment; both extreme temperature and metallic interface isolation
- Certified MEF 2.0 compliant ensuring robust support for SLA-based carrier Ethernet services
- Enhanced lightning protection enables cell site tower deployment
- SLA management via Ethernet OAM-based troubleshooting and performance monitoring tools
- Resilient access support via Link Protection
- Supports IPTV video service delivery

### Overview

Gigabit services delivery in particular present challenges to the service provider as they look to preserve a high quality of experience while battling network congestion. This fact drives the need for Carrier Ethernet solutions that can effectively support a mix of SLA-based business Ethernet services along with services for backhaul and mobile traffic.

The ADTRAN® NetVanta® 8008 is a versatile, multi-service, multi-rate Gbps Carrier Ethernet switch purpose-built for deployment at the customer edge. This Ethernet Network Termination Equipment (NTE) brings together the value of several ADTRAN solutions to deliver advance Ethernet QoS-based business services.

The core Ethernet access features of this product include a powerful Ethernet processor, four flexible SFP interfaces of which two can run at speeds of 2.5 Gbps and four 10/100/1000 Mbps electrical interfaces. Power can be delivered by two redundant DC sources. Additionally, ADTRAN provides external AC adapters to provide the DC power. To feed the flexible bandwidth management; Ethernet flow mapping, prioritization and tagging; as well as the versatile management options make the NetVanta an excellent choice as a premium Ethernet service termination solution.

This Carrier Ethernet-centric solution uniquely delivers residential broadband applications such as IPTV by supporting IGMPv3 and DHCP Option 82 or IPv6 LDRA. The NetVanta 8008 also supports dozens of Gigabit-level Internet services. The NetVanta 8008 simultaneously supports the delivery of IPTV and robust Ethernet services.


In order to support small cell backhaul applications collocated with business Ethernet and/or premium residential broadband services, these solutions allow an operator to recover network clocking at the customer site using only packet transport via a variety of methods.

There are some unique NetVanta 8008 applications including:

- Feeding the WAN connection via a GPON SFP, allowing the same access technology to be used for both residential and business applications.
- Using it as an aggregation device to deliver 2.5 Gbps point-to-point Ethernet links.
- Utilize Link Aggregation to deliver a 5 Gbps WAN connection to a business or residence.



# NETVANTA 8008

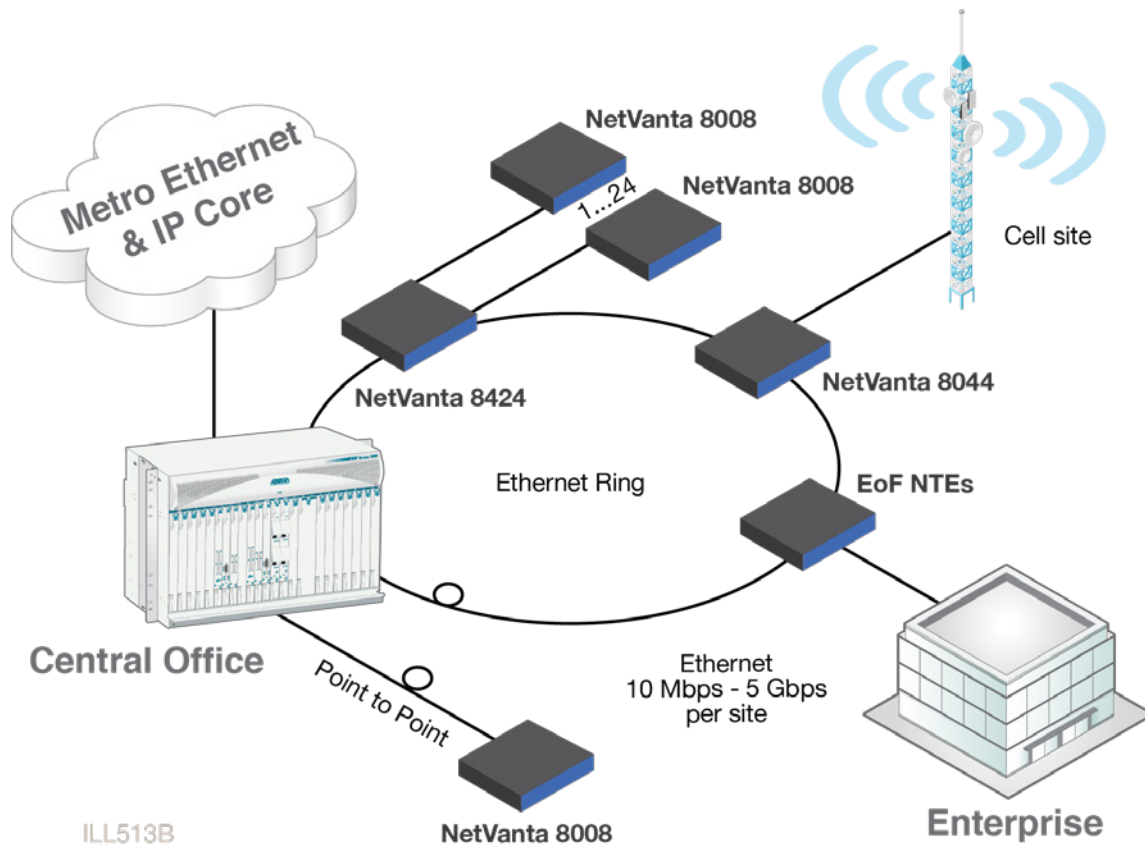

## Product Specifications

### Front Panel Interfaces

- Four 10/100/1000 Base-T Interface Version Via RJ-45
- Two 1 Gigabit Ethernet interfaces via SFP Cages
- Two 2.5 Gigabit Ethernet interfaces via SFP Cages
- All Ethernet Ports may be used for either Network WAN or Customer-side LAN Connections
- 100BaseX SFP also Supported to allow Fast Ethernet Fiber Lease
- DB9 Local Craft Port for Support of RS-232 Interface for Local Management
- Field-replaceable Fan Module

### Physical Dimensions

- Desk, Rack and Wall Mountable
- Rack-Mountable Solution in 19 in. or 23 in. Wide Telecom Racks
- 1.7 in. x 8.6 in. x 9.0 in. (44 mm x 219 mm x 273 mm) (H x W x D)
- **Weight:** 4 pounds

### Power Supply, Power Consumption, Heat Dissipation

- Redundant, Dual A and B Power Feed +24VDC/-48 VDC
- Ground/Earth Provided via Post- and Lug-type Connector
- Typical Power Consumption is 17Watts, and 19 Watts with the Fan Tray installed.

## Operations and Maintenance

### Environmental Hardening

- **Operating Temperature:**
  - With Fan Module (Remote/Cabinet Environments)  
-40° F to 149° F (-40° C to 65° C)
  - Without Fan Module (controlled/central office environments -40° to 122° F (-40° C to 50° C)
- **Storage Temperature:**  
-40° F to 185° F (-40° C to 85° C)
- **Relative Humidity:** GR-63-CORE Five Percent to 95 Percent, Non-condensing
- Enhanced Metallic Interface Voltage Surge Protection and Isolation

### Ethernet Services Support

- **Classification of Traffic Based on:**
  - Per UNI Port, CE VLAN ID (C-tag) and/or CE
  - VLAN P-Bits, Source and/or Destination MAC Address, DSCP Fields
  - Single Stack VLAN and Double Stack VLANs (Q-in-Q)
- Manipulation Based on 802.1p and DSCP Fields
- STAG TPID Provisioning Supports 802.1ad and 802.1Q Standards
- Port-based Service Support
- Service Scale and Flexibility
- MEF 9, 14, 20, 23.1, 30, 33 Compliant E-Line, E-LAN, E-Tree, E-Access
- Eight Queues, Strict Priority and/or Weighted Fair Queue Schedulers
- Configurable to EtherType and TPID for Service Flexibility
- VLAN IDs 0 – 4095; EVC Configurable in the Range of 2 – 4,094
- Supports 10k Jumbo Frame in Four Byte Increments
- 8k Active MAC Address; Ability to Disable MAC Learning
- Ingress Policers (tr3CM), CIR and EIR Settings to 64 Kbps Granularity, Configurable Burst through EBS and CBS Settings
- Egress Shaping per Port

### IPTV Support

- Internet Group Management Protocol v2 and v3
- Dynamic Host Configuration Protocol support with Option 82
- Lightweight DHCPv6 Relay Agent support

### Security

- TACACS+ Authentication, Authorization
- RADUIS Authentication, Authorization
- SSHv1/v2 and SFTP Clock Synchronization/Recovery
- ADTRAN Differential and Adaptive Timing Methods
- Synchronous Ethernet Support for Frequency

### Regulatory Agency Approvals

- FCC Part 15 Class A
- FCC Part 68
- UL 60950, CAN/CSA C22.2 No. 60950
- EN 60950, IEC 60950, AS 3260/ AS NZS60950
- NEBS Level 3
- RoHS 2002/95/EC
- ITU-T K21:2000

### Basic Device Management

- Common Operational Model (i.e. FCAPS) used for Every Ethernet Access Method
- Local Management via DB-9 RS232 or via a 10/100/1000 Copper Port
- Telnet via an IP-Based Connection
  - Inband Management on any VLAN from 2 to 4,094
- ADTRAN Advanced Operational Environment Service Management System
  - TL1 or XML (Future) Gateway
- The Unit can be Managed by and Report to up to 16 Different Users Simultaneously
  - Accounts of Existing and New Users can be Defined/ Changed Remotely, using a Dedicated RADIUS or TACACS+ Server.
  - The Current Date and Time can be Retrieved from a Centralized Location by Synchronizing with a (an)
    - ◆ NTP (Network Timing Protocol) Server
- Software Upgrades and Configuration Files can be Downloaded/Uploaded to/from NTE Via SFTP, FTP, X-Modem, and Y-Modem

## Ordering Options

Hardware Options	Part No.
NetVanta 8008 Multi-Service Edge Switch	1174808F1
NetVanta 8008 Fan Module	1174862F1

Mounting Options	Part No.
19" Rack Mount, One NetVanta 8008	1174865F1
19" Side-by-Side, Two NetVanta 8008	1174867F1
23" Side-by-Side, Two NetVanta 8008	1174867F1
23" Rack Mount, One NetVanta 8008	1700509G1
	1174865F1
Wall Mount, One NetVanta 8008	1174866F1



Pulse Supply  
909 Ridgebrook Road., Sparks, Maryland 21152, USA  
TEL : +1-410-583-1701 FAX : +1-410-583-1704



E-mail: [sales@pulsesupply.com](mailto:sales@pulsesupply.com)  
<https://www.pulsesupply.com/adtran>

### 61174808F1-8B

November Copyright © 2017 ADTRAN, Inc. All rights reserved.  
ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and NetVanta are registered trademarks of ADTRAN, Inc. and its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.  
ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit [www.adtran.com/warranty](http://www.adtran.com/warranty)  
ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding ADTRAN's export license, please visit [www.adtran.com/exportlicense](http://www.adtran.com/exportlicense)

ADTRAN  
Certified  
Supplier



ISO 9001  
ISO 14001  
TL 9000